


GPS-A0015A

Concealed camera with led lighting fixture

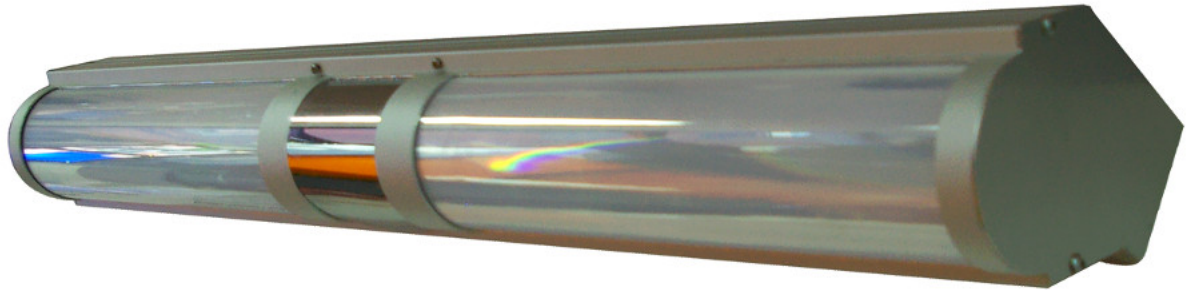

- Hidden Camera in powerful LED light system
- 600 TV Lines excellent high horizontal resolution
- WDR (Wide Dynamic Range) for extreme backlight situations
- Supplied with bracket for wall mount and Power Supply
- Adjustable Light Level by Potentiometer
- Environment Friendly: Low power Consumption, Highly Recyclable

SUMMARY

ALADDIN PROTECTS AREAS AT HIGH RISK OF VANDALISM

The Aladdin security camera from Grundig offers a unique solution to high risk assets such as ATMs and communal letter boxes. The Aladdin is hidden inside an LED lamp and as such is undetectable. The premium micro-camera is very compact and can be installed in virtually any location without being recognized as a camera.

Most vandals and thieves try and damage CCTV cameras at high risk locations, such as ATMs. If this occurs, CCTV evidence is usually impossible to obtain. The Aladdin, however, is rarely targeted because it is not recognised as a camera. It will therefore continue to record events.

If the Aladdin is installed alongside a false or low-cost camera, criminals target the false camera but remain unaware that the Aladdin is recording their actions.


SUITABLE FOR USE IN BANKS, COMMUNAL AREAS AND PLACES EXPERIENCING HIGH VANDALISM

Every location at risk of vandalism can benefit from the Aladdin camera solution. Vandals and thieves can be identified and prosecuted using Aladdin's high quality video images as evidence.

SPECIFICATIONS

Image Sensor	1/3" CCD (Sony PS Super HAD with WDR)
Col/B&W	Off/On/Auto (fixed IR-Cut filter)
Scanning System	PAL, 50Hz, 625L (V), 2:1 Inter Line Transfer
Pixels - Total	795(H) x 596(V)
Pixels - Effective	752(H) x 582(V)
Resolution	600 (H) lines
S/N Ratio	>52 dB
Lens Focal Length	Pinhole 3.7 mm, F2.0
Sens Up	Off ~ x512, auto
Number of Privacy Zones	12 (polygonal method)
Motion Detection	On/Off
High Speed Shutter	1/50 ~ 1/10.000 sec, auto
BLC: Back Light	On/Off
AGC	Off, Low, High
ELC	On (max. 1/200,000 s)/Off
Digital Noise Reduction (DNR)	On/Off
eXtended Dynamic Range (XDR)	Off/Low/Mid/High
Additional Features	Digital Zoom, PIP, H/V Reverse, Positive/Negative inversion
Camera ID	54 character, 2 lines
White Balance	ATW-1/ATW-2/AWC/Manual
Video Outputs	1 CVBS (1Vpp), BNC
Operating Temperature	-10°C ~ +50°C
Humidity	less than 90%, non condensing
Supply Voltage	230 VAC
Body material	Aluminum and Polycarbonate
Protection Rating	IP66 / IK10
Certification	CE, NFC 15-100 with external Power Supply and Voltage Separation
Light Temperature	4800°K
Light Level @ 1m	1056 Lux
LED Type	NICHIA
Remote Control	Optional DALI Driver
Power Consumption	44 W
Weight	7 kg
Dimensions w*h*d	1030 x 124 x 160 mm

DIMENSIONS

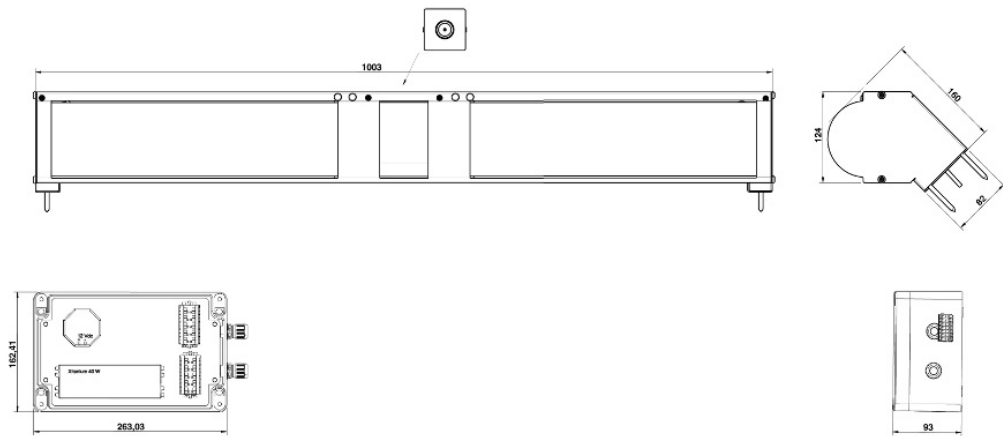

3D view from Alladin with accessories

