



VMC-19LEDMD Article number: 209807

19" (48cm) LCD Professinal Monitor, 1280x1024, 12V, Protection Glass, HDMI, VGA

Mainfeatures

Professional PAL/NTSC LCD Monitor
Built to run 24x7x365 continuously

Resolution of 1280x1024

Quick signal switching

Compact metal cabinet, Protection glass

IR remote control included

Multi language on-screen menu

3D comb filter, PIP / PBP multi display funktion

CVBS, S-Video, HDMI, RGB and audio input

Artifacts, noise and motion blur reduction

Integrated loudspeakers

Metal cabinet with tilt back

Specifications

Resolution pixels	1280x1024
Video standard	PAL
Resolution	1280x1024 (5:4)
Display:	
Aspect ratio	4:3
Contrast ratio typical	1000:1
Response time typical	14 ms
Brightness typical	250 cd/m ²
Backlighting	LED
Viewing angle vertical	178 °
Viewing angle horizontal	178 °
Screen size	19"

VMC-19LEDMD

Continued Specifications

Screen Size (cm)	48,2 cm		
Features:			
Comb filter	3D comb filter with de-interlace		
Menu languages	English, French, German, Italian, Spanish		
Interfaces / Inputs / Outputs:			
Video inputs (type)	HDMI, VGA, 2x composite (CVBS)		
General:			
Dimensions (HxWxD)	365x416x87mm		
Mount	VESA standard (4 threads M4, 100x100mm)		
Colour (housing)	black		
Housing material	metal		
Housing color	black		
Weight	6.3kg		
Loudspeaker	built-in		
Power consumption	45W		
Supply voltage	100 ~ 240VAC, 50/60Hz		
Temperature range (operation)	0°C ~ +40°C		
Certificates	FCC, Class A		
Scope of delivery:			

Special features Protection glass Floding base Anti-Burn-in Technology


VMC-19LEDMD

Available Accessories

Image	Prod. No / Label	Description
	208865 / VMC-LCD/WMB-2	Wall Bracket for TFT/LCD Monitors, straight, VESA
Ţ	208870 / VMC-LCD/CMB-3	Ceiling Mount Bracket for TFT/LCD Monitors, 15" up to 37", VESA
	90468 / VMC-LCD/WMB-4	Wall Bracket for LCD Monitors up to 23", Pan and Tiltable

VMC-19LEDMD

Technical Drawing

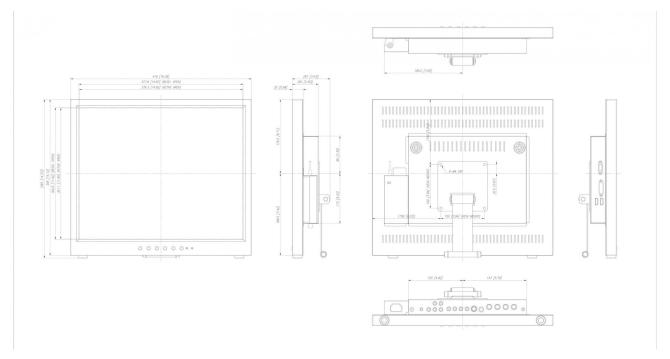

Your Contact Person

