



IT9389-HT

Turret Dome Network Camera

5MP • 30M IR • WDR Pro • SNV • Smart Stream III •
IP66 • Turret Dome

VIVOTEK's IT9389-HT is a H.265 outdoor turret network camera equipped with a 5-Megapixel sensor, enabling resolution of 2560x1920 at 30 fps. Featuring VIVOTEK SNV and WDR Pro technology, the IT9389-HT is capable of capturing high-quality imagery in both high contrast and low light environments.

The IT9389-HT offers a remote focus lens for different user scenarios. IR illuminators are equipped with 30-meter effective range for better night visibility. To provide reliable coverage in harsh outdoor environments, the IT9389-HT is encased in IP66 and IK08 housing.

By employing VIVOTEK's Smart Stream III technology and H.265 compression, the IT9389-HT is able to reduce bandwidth up to 90%* while maintaining supreme image quality. Additionally, VIVOTEK VADP (VIVOTEK Application Development Platform) allows users to customize applications for the ever-expanding number of user scenarios in the diversified surveillance market.

* Depending on scenes

Key Features

- H.265 Compression Technology
- 30 fps @ 2560x1920 (WDR Pro on)
- 3.7 ~ 7.7 mm, Remote Focus
- Smart Stream III to Optimize Bandwidth Efficiency
- WDR Pro for Unparalleled Visibility in Extremely Bright and Dark Environments
- SNV (Supreme Night Visibility) for Low Light Conditions
- Built-in IR Illuminators, Effective up to 30 Meters
- Weather-proof IP66-rated and Vandal-proof IK08-rated Housing
- Built-in Microphone



Easy Installation and Compact Size

Technical Specifications

Model	IT9389-HT	Video Streaming	Adjustable resolution, quality and bitrate, Smart Stream III
System Information		Image Settings	Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks; Scheduled profile settings, HLC, defog, 3DNR, DIS, video rotation
CPU	Multimedia SoC (System-on-Chip)	Audio	
Flash	128MB	Audio Capability	One-way Audio
RAM	512MB	Compression	G.711, G.726
Camera Features		Interface	Build-in microphone
Image Sensor	1/2.7" Progressive CMOS	Effective Range	5 meters
Max. Resolution	2560x1920 (5MP)	Network	
Lens Type	Vari-focal, Remote Focus	Users	Live viewing for up to 10 clients
Focal Length	f = 3.7 ~ 7.7 mm	Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/ RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS, CIFS/SMB
Aperture	F1.9 ~ F2.9	Interface	10 Base-T/100 Base-TX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
Iris type	Fixed-iris	ONVIF	Supported, specification available at www.onvif.org
Field of View	38° ~ 80° (Horizontal) 29° ~ 60° (Vertical) 48° ~ 101° (Diagonal)	Intelligent Video	
Shutter Time	1/5 sec. to 1/32,000 sec.	Smart Motion Detection	Five-window video motion detection, human detection, time filter
WDR Technology	WDR Pro	VCA	Standard VCA (optional) *Including line crossing detection, field detection, loitering detection
Day/Night	Yes	VADP Package	Genetec package, Trend Micro IoT Security, Smart Motion Detection, Stratocast(support)
Removable IR-cut filter	Yes	Alarm and Event	
IR Illuminators	Built-in IR illuminators, effective up to 30 meters with Smart IR, IR LED*2	Alarm Triggers	Motion detection, manual trigger, periodical trigger, system boot, recording notification, camera tampering detection, audio detection, MicroSD card life expectancy, Shock Detection
Minimum Illumination	0.09 Lux @ F1.9 (Color) 0.01 Lux @ F1.9 (B/W) 0 Lux with IR illumination on	Alarm Events	Event notification using HTTP, SMTP, FTP, NAS server and MicroSD card File upload via HTTP, SMTP, FTP, NAS server and MicroSD card
Pan Range	359°	General	
Tilt Range	75°	Connectors	RJ-45 cable connector for Network 10/100 Mbps PoE connection*1
Rotation Range	180°	LED Indicator	System power and status indicator
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in)	Power Input	IEEE 802.3af PoE Class 0
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording		
Video			
Compression	H.265, H.264, MJPEG		
Maximum Frame Rate	30 fps @ 2560x1920 60 fps @ 1920x1080		
Maximum Streams	3 simultaneous streams		
S/N Ratio	52dB		
Dynamic Range	120 dB		

Technical Specifications

Power Consumption	Max. 9 W (IR on) Max. 8 W (IR off)
Dimensions	Ø 122 x 99 mm (w/ mounting bracket) Ø 108 x 79 mm (w/o mounting bracket)
Weight	392 g (w/ mounting bracket) 332 g (w/o mounting bracket)
Casing	IP66, IK08
Safety Certifications	CE, FCC Class A, UL, LVD, VCCI, C-Tick
Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
Humidity	90%
Warranty	36 months
System Requirements	
Operating System	Microsoft Windows 8/7 Mac 10.12 (Chrome only)
Web Browser	Chrome 58.0 or above Internet Explorer 10/11


Other Players	VLC: 1.1.11 or above QuickTime: 7 or above
---------------	---

Included Accessories


Others	Quick installation guide, alignment sticker, screw pack, mounting bracket
--------	--

Dimensions

w/o mounting bracket



w/ mounting bracket

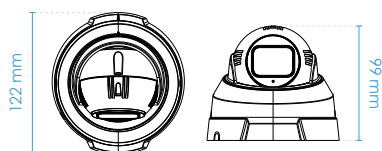

Compatible Accessories

Mounting Kits



AM-21M
L-shape Bracket



AM-52E
Mounting Adapter

Ordering Information

Model	Description	Part Number
IT9389-HT	5MP, 30fps, 3.7~7.7mm, 30M IR, Smart Stream III, Operating Temperature: -20°C ~ 50°C	100200700G
IT9389-HT (Black)	5MP, 30fps, 3.7~7.7mm, 30M IR, Smart Stream III, Operating Temperature: -20°C ~ 50°C, Black	100210300G