

High precision digital processing

3CCD progressive scan color camera

# HV-F31/F22

IEEE  
1394

camera  
link



### Outline

- Camera Link**  
HV-F31CL : 1/3" XGA (1024x768)  
30 frame/second  
HV-F22CL : 1/2" SXGA (1360x1024)  
15 frame/second
- IEEE1394**  
HV-31F : 1/3" XGA (1024x768)  
7.5 frame/second (RGB)  
HV-22F : 1/2" SXGA (1360x1024)  
7.5 frame/second (RGB)

### Features

- Excellent color in image capture
- High resolution
- Auto shading correction
- Independent six color adjustment
- IEEE1394 IIDC(Ver. 1.30) / Camera Link

## Example Applications

HV-F31 and HV-F22 are designed for a wide range of applications.

### Printing Check

Detection of uneven printing



### Fruit Check

Check on fruit damage and ripening



### Car Body Coating

Check on uneven coating and scratches



### Biological Microscope

Observation of cells



## Merits of 3-CCD Camera


### Color Detection

(optimum for check on uneven printing and fruits)

Subtle color differences are detectable by processing (emphasis or subtraction) of a specific color using 6-color independent masking.

- Example of improved detection accuracy on apple ripening level

Comparison after subtraction of a red component and emphasis of a yellow component

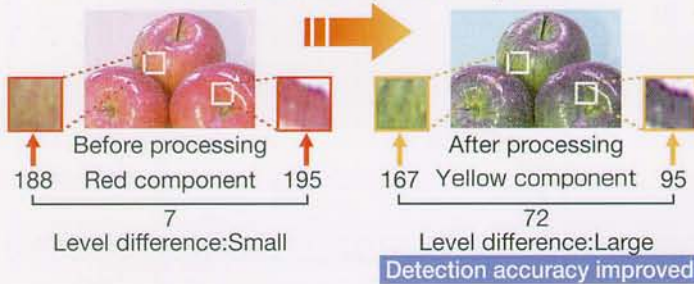


(Note) This camera is not used for output of the above numeral (resolution in 8bit). It is output of a processed image.


- Because arithmetic operation is performed inside the camera, it will not apply a load to the CPU of equipment, so high-speed image processing is ensured.

### Auto Shading

Color shading (uneven color) due to lens and lighting can be automatically corrected.

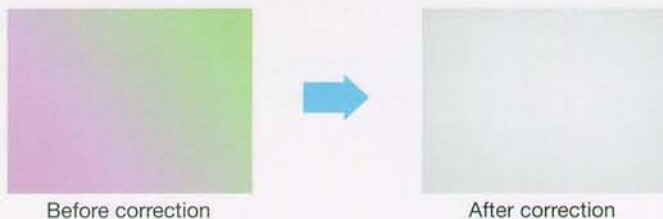

### 6color Independent Masking

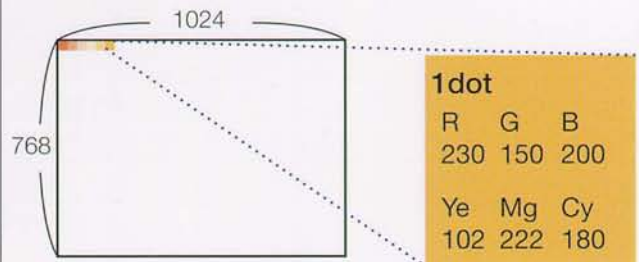

Each color of R,G,B,Ye,Mg and Cy can be represented and changed as an independent numeric value.


Colors are freely changeable and the following are available.

- Detection of a specific color
- Natural color reproduction
- Red alone changed



### Color Resolution

Attention to rope mesh

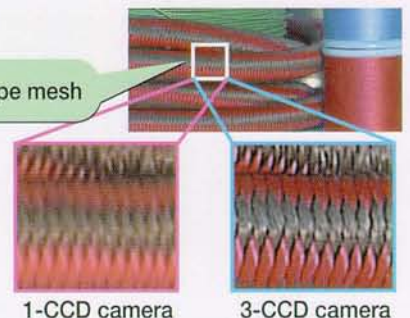Finer mesh image is obtainable with 3-CCD



# Comparison of Interfaces

	HV-F31CL/F22CL	HV-F31F/F22F
Interface	Camera Link	IEEE1394
Cable length	10m	4.5m
Connector	26P×2(medium configuration) ※ Base configuration applicable	6Pin(with lock)
Transmissible Data volume	900Mbps(medium configuration) 700Mbps(base configuration)	400Mbps
Remote control	CameraLink API	IIDC
Rear view		

**Caution** For power supply from IEEE1394, contact the sales representative

## IEEE1394


- Features**
  - Direct PC connection without using a frame grabber board
  - Small-diameter cable
  - Multiple cameras connectable by use of hub
- Specifications**
  - Compatible OHCI, 400Mbps
  - Non-compression
  - Conforming with IIDC1.3

## Transmission Format


The HV-F31F/F22F cameras allow transmission of an image with its size changed by remote operation.

HV-F31F				
Camera mode		Frame Rate	bit/pixel	bit/ch
XGA(1024×768)	YUV	15	16	8
	RGB	7.5	24	8
SVGA(800×600) *1	YUV	30	16	8
	RGB	15	24	8
XGA(1024×768)	RGB	3.75	48	10

HV-F22F				
Camera mode		Frame Rate	bit/pixel	bit/ch
SXGA(1280×960)	YUV	7.5	16	8
	RGB	7.5	24	8
VGA(640×480) *2	YUV	30	16	8
	RGB	30	24	8
SXGA(1360×1024)	YUV	7.5	16	8
	RGB	7.5	24	8
	RGB	1.875	48	10



\*1: The screen center shown above is effective for SVGA output




\*2: The screen center shown above is effective for VGA output

HV-F31CL				
Camera mode		Frame Rate	bit/pixel	bit/ch
XGA(1024×768)	RGB	30	30	10

HV-F22CL				
Camera mode		Frame Rate	bit/pixel	bit/ch
SXGA(1360×1024)	RGB	15	30	10

## Application

Various camera functions, such as a Shutter, Gamma, Masking, etc, are available for adjustment through the easy to use GUI software which is included with the camera.

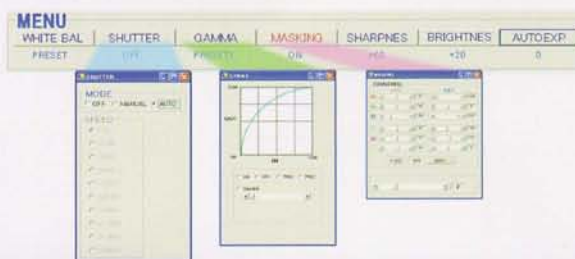


## Frame On-demand function


An image can be acquired at a desired timing by external input of a trigger signal.

### •One-trigger mode

When a single trigger pulse is input, exposure will start at the rising edge of the pulse and will end at the falling edge. Then, V.SYNC will be reset immediately followed by output of the image. Pulse width corresponds to the exposure time

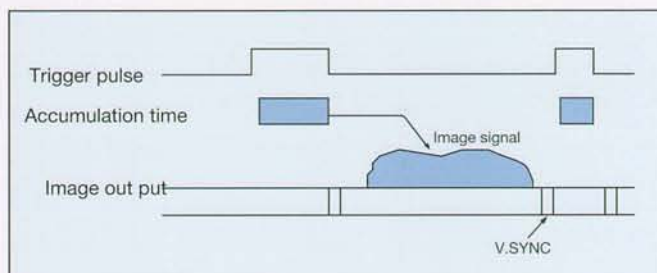

## RGB spectral response characteristics

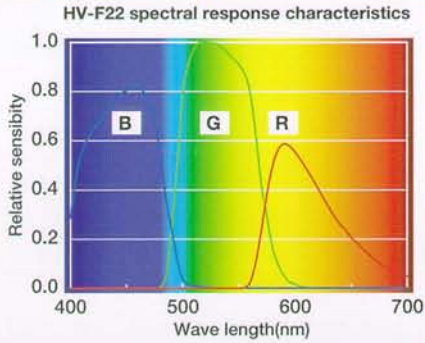

## Pin arrangement

■ Camera Link (HV-F31CL/F22CL)

3M 10226-2200VE

connector1		connector2	
1	GND	14	GND
2	X0-	15	X0+
3	X1-	16	X1+
4	X2-	17	X2+
5	Xclk-	18	Xclk+
6	X3-	19	X3+
7	SerTC+	20	SerTC-
8	SerTFG-	21	SerTFG+
9	ExtVD[CC1]-	22	ExtVD[CC1]+
10	Trig[CC2]+	23	Trig[CC2]-
11	ExtHD[CC3]-	24	ExtHD[CC3]+
12	NC[CC4]+	25	NC[CC4]-
13	GND	26	GND

■ IEEE1394 (HV-F31F/F22F)

molex 55395-0611


1	+12V IN
2	GND
3	TPB-
4	TPB+
5	TPA-
6	TPA+

■ 12pin(common)

HIROSE HR10A-10R-12PB(01)

1	GND	7	VD IN
2	+12V IN	8	GND
3	GND	9	TRIG(H)
4	FLASH OUT	10	TRIG(C)
5	GND	11	+12V IN
6	HD IN	12	GND

## When using lens

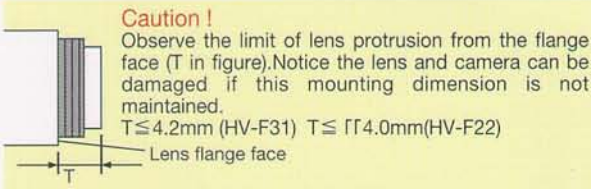


## Specifications

	HV-F31	HV-F22
Frame rate	30f/s(F31CL)15f/s(F31F)	15f/s(F22CL)7.5f/s(F22F)
Pixel Clock	28.8MHz	
CCD	1/3"	1/2"
Imaging area	4.76(H)×3.57(V) mm	6.32(H)×4.76(V) mm
Effective pixels	1024(H)×768(V)	1360(H)×1024(V)
Unit cell size	4.65(H)×4.65(V)um Square pixel	
Gain	AGC(0~+12dB)	
Trigger	One trigger mode	
Shutter	1/100,000~1/30~4(seconds)	1/100,000~1/15~4(seconds)
Ambient	operating 0~+40°C(+32°F to +104°F)	
Vibration	29 m/s <sup>2</sup> (3 G)	
Shock	490 m/s <sup>2</sup> (50 G)	
Power supply	12V nominal Approx.9W	
Dimensions	65(W)×65(H)×130(D) mm	
Mass	Approx. 600 g (21 oz) (not including lens)	

## Dimension

※All models common dimension

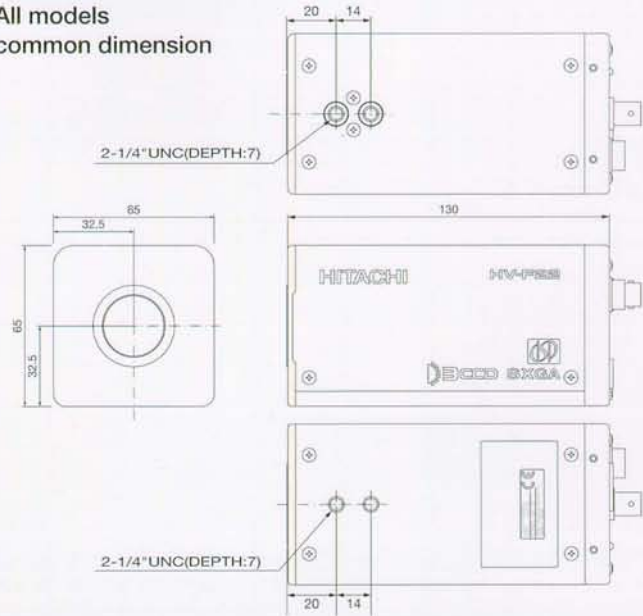

## Standard Composition

Camera	1
Operation Manual	1
Sample Software (CD-ROM)	1

## Optional Accessories

IEEE1394Cable	1
Junction Box (JU-M1A)	1

**CAUTION:** To ensure safe operation, please read the instruction manual before using this product.

These Specifications are subject to change without notice.

# Hitachi Kokusai Electric Inc.

Head Office  
14-20, Higashi-Nakano 3-chrome, Nakano-ku, Tokyo 164-8511, Japan  
Phone : +81 (0) 3-3365-5928, Fax : +81 (0) 3-3365 5929  
URL : www.h-kokusai.com

**Hitachi Denshi (Europa) GmbH**  
Head office  
Weiskircher Straße 88, D-63110 Rodgau, Germany  
Phone : +49 6106-69920, Fax : +49 6106-16906  
URL : www.hitachi-denshi.de  
General email address : webmaster@hitachi-denshi.de

**Hitachi Denshi (Europe)**  
Leeds Office  
Brookfield House, Selby Road, Garforth, LEEDS, LS25 1NB, United Kingdom  
Phone : +44 (0)113 287 4400, Fax : +44 (0)113 287 4260  
URL : www.hitachi-denshi-uk.com  
General email address : sales@hitachi-denshi-uk.com

**Hitachi Denshi (UK) Limited**  
Head office  
Windsor House, Britannia Road, Waltham Cross, Hertfordshire, EN8 7NX, United Kingdom  
Phone : +44 (0) 1992 704 595, Fax : +44 (0) 1992 704 599

These products are manufactured at a factory which has received quality control system certification in accordance with the ISO international standards.



CERTIFICATE No.  
JMI-0062  
ISO 9001/BS 5750Pt1  
EN 29001/JIS Z9901