

GCA-C0335P

Motorized Dome Day/Night Camera, 12x Zoom, WDR



- 12x motorized optical zoom with 12x digital zoom
- High Speed Pan/Tilt (400°/sec), minimum speed (0.5°/sec)
- WDR function, Colour/B&W function with removable IR cut filter
- 1/4" Super-HAD II CCD *
- 650 TV Lines
- Digital Noise Reduction
- RS485 - Multiprotocol
- 650 TV Lines
- Digital Image Stabilization

SUMMARY


The GRUNDIG Swiftdome Cameras are suitable for both outdoor and indoor use. The robust vandal resistant housing with sun shield protects the camera not only against weather but also against physical attacks. Of course, the cameras also offer a variety of alarm inputs and a privacy zone function. Even in difficult lighting situations, the cameras are able to provide superior images. Due to the large focal length range of the zoom module and the fast rotation motor, the cameras are particularly suitable for monitoring large outdoor areas, spacious warehouses, supermarkets, or driveways. Even at great distances, individuals can be identified or perceived.

When positioned correctly, one GRUNDIG Swiftdome Camera allows you to save a multitude of fix cameras.

SPECIFICATIONS

Image Sensor	1/4" CCD (Super HAD 2 CCD)
Pixels - Total	976x582 (570k)
Resolution	650 (H) lines
Col/B&W	On/Off/Auto, IR-cut filter removable (ICR)
Sensitivity	0.1 lux (Colour) / 0.01 lux (B&W)
Zoom Ratio	x 12
Focal Length	3.8 ~ 45.6 mm
Aperture Ratio	F 1.6 ~ C
Lens Drive Type	Auto iris (DC)
OSD	Yes
Camera ID	20 character
Digital Zoom	Off/1 ~ 12x
BLC	On/Off
WDR	ON/OFF
Digital Image Stabilization (DIS)	Off/On
White Balance	Auto / Manual
Number of Privacy Zones	16
Number of Preset Sequence	256 8
Pan Speed	Manual: 1°/s ~ 80°/s, Preset: 400°/s (max.)
Tilt Speed	Manual: 0.5°/s ~ 90°/s, Preset: 400°/s (max.)
Range Panning	360° endless
Range Tilting	-10° ~ 190°
Operating Temperature	0°C ~ +40°C
Humidity	less than 90%
Supply Voltage	24 VAC
Regulation	CE, FCC, RoHS Compliant
Power Consumption	18 W
Weight	1.2 kg
Dimensions w*h*d	ø131 x 200 mm

DIMENSIONS

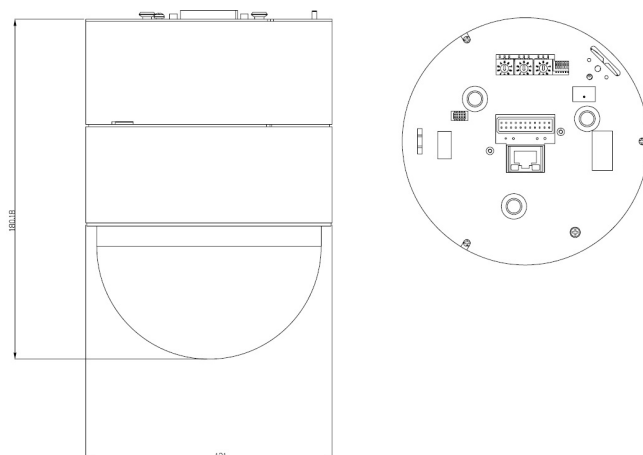

ACCESSORIES



GBR-IC02
Flush-Mount Adapter for
Vandal-Resistant IP Dome Camera



GBR-AM01
Hanging Mount Adapter



GBR-WA02
Wall Bracket for Motor Dome Cameras



GBR-CM01
Corner Mount Adapter



GBR-PM01
Pole Mount Adapter

ACCESSORIES



GBR-CE01
Pendant Mount Bracket



GBR-AM02
Adapter Ring for Pelco Pendant Mount
with 1,5" NPT thread
